


CONNECTTM WORK TOOLS

HYDRAULIC COMPACTOR PLATE

TECHNICAL FEATURES

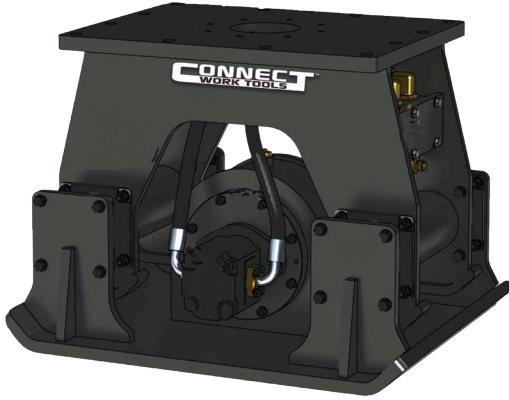

1. Integrated Flow Control Valve
2. Self-Aligning Bearings
3. Oil Lubrication System. Maintenance Free Lubrication.
4. Compatible Mounting Brackets with CH Breaker Series and CG Grapple Series

TECHNICAL DATA

	UNIT	CC 4K	CC 8K	CC 14K	CC 20 K	CC 22K	
Carrier Machine Class	Metric Ton	3 - 7	5 - 15	12 - 25	18 - 25	20 - 45	
	lb	6,600 - 15,400	11,000 - 33,000	26,000 - 55,000	39,700 - 55,100	44,000 - 99,000	
Weight	kg	166	299	624	903	1,045	
	lb	366	660	1,375	1,990	2,304	
Required Oil Flow	lpm	42	78	100	117	147	
	gpm	11	21	26	31	39	
Force	kg	1,600	3,350	6,300	7,000	10,000	
	lb	3,527	7,385	13,889	15,421	22,046	
Frequency	vpm	2,100					
Pressure (Max)	bar	140					
	psi	2,030					
Return Pressure (Max)	bar	10					
	psi	145					
Dimension	A	mm/in	700m / 27.55 in	850 mm / 31.50 in	960 mm / 37.80 in	1,050 mm / 41.33 in	1,253 mm / 49.33 in
	B	mm/in	410 mm / 16.14 in	610 mm / 24.01 in	740 mm / 29.13 in	800 mm / 31.5 in	860 mm / 33.85 in
	C	mm/in	506 mm / 19.92 in	564 mm / 22.20 in	692 mm / 27.24 in	687 mm / 27.04 in	803 mm / 31.61 in

